


## M Series | LK8M42 Sod Farm





| Specifications M Series: LK8M42 |  |  |
|---------------------------------|--|--|
| General                         |  |  |
| Type of Vehicle                 | Liftking LK8M42 Rought Terrain Diesel Forklift Truck |  |
| Manufacturer                    | Liftking Industries Inc                              |  |
| Rated Capacity                  | 8,000 lb @ 24 in Load Center                         |  |
| Max. Lift Height                | 168 in / 4.27 m                                      |  |
| Length (Less Forks)             | 156 in / 3.96 m                                      |  |
| Wheel Base                      | 82 in / 2.06 m                                       |  |
| Overall Width                   | 88 in / 2.24 m                                       |  |
| Overhead Guard Heights          | 92 in / 2.34 m                                       |  |
| Height of Mast Collaspsed       | 162 in / 4.12 m                                      |  |
| Ground Clearance                | 12 in / 30 cm  |  |
| Forward Mast Tilt               | 20 ¼   |  |
| Rearward Mast Tilt              | 10 1/4   |  |
| Weight (No Load)                | 15,800 lb / 7,165 kg                                 |  |

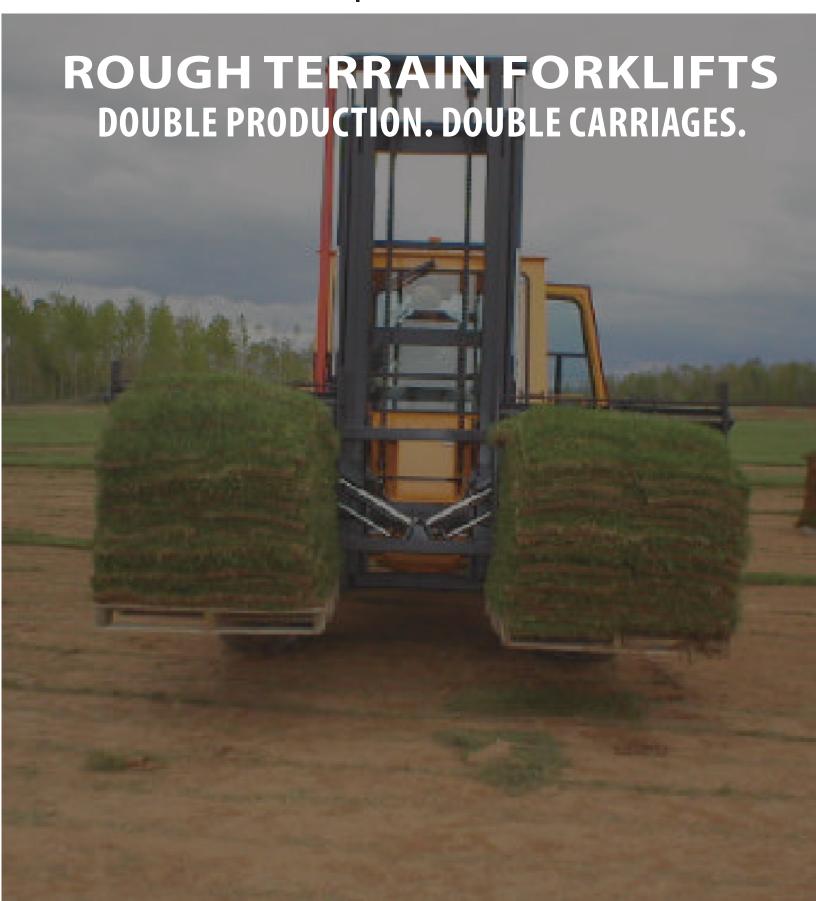



| ENGINE            |   |
|-------------------|---|
| Manufacturer      | Perkins, 1004-42                          |
| Horsepower        | 86 BHP @ 2,600 RPM                        |
| TRANSMISSION      |   |
| Туре              | Powershuttle                              |
| Speed             | 4 Forward / 4 Reverse                     |
| AXLES             |   |
| Steer, Type       | Heavy Duty Industrial, Single Cylinder    |
| Front Drive, Type | Heavy Duty Final Drive Outboard Planetary |
| BRAKES            |   |
| Service Type      | Fully Enclosed Inboard Wet Disc           |
| Location          | On Drive Axle                             |

Hand Operated



Parking Brake

## **Standard Equipment**

All M Series Forlifts feature 60" Shaft Type Carriage • 48" Forks • Wet Disc Brakes • Roller Masks • Hydrostatic Steering • Mast Side Shift Total 6 Inches • Lightening Kit includes Two Headlights and Two Tails Lights • Safety Group includes Overhead Guard, Safety flasher, Back-Up Alarm, Electric Horn and Seat Belt • Anti-Vandalism Kit • Diesel Cold Start Kit, inclues; Differential Lock, Block Heater • Gauge Group Consists of Hour Meter. Fuel, Volt Meter and Engine Temperature Indicator • Parts Manual, Operator's Manual and Service.

## **Optional Equipment**

Closed Cas Complete with Heater, Defroster, Fan, Windsheild Wiper, Dome Light, Sliding Window, Lift Off Removal Doors and Sound Insulation • Operational Forks from 60" to 96" • 3-Section Mast • Freelift • Clearview • Mast Buckets • Gas Engine • Propane Engine • Catalytic Muffler • Hi-Mount Air Cleaner • Extra Worklights • Engine Air Pre-Cleaner • Ourside Rearview Mirrors • Rotating Beacon • Extra Control Valve and Handle • Hydraulic Accumulator • Tachometer • Mast Mounted Guarded Lights • Fire Extinguisher • Dead Man Seat.

Liftking reserves the right to make changes in specifications shown, herein, and improvements, or discontinue manufacture at any time without notice or obligation. The information contained herein is general in nature and is not intended for specific application purposes.





Liftking is ISO 9001:2015 registered (EN ISO 9001:2015; BS EN ISO 9001:2015; ANSI/ASQ Q9001:2015)

7135 Islington Avenue, Woodbridge, Ontario. L4L 1V9 Tel: 905-265-3965 | Fax: 905-851-6396